


Solenoid operated poppet valve

Flange construction

- ◆ 2/2-, 3/2- and 3/4-way
- ◆ normally open and normally closed
- ◆ $Q_{\max} = 6 \text{ l/min}$
- ◆ $p_{\max} = 350 \text{ bar}$

NG3-Mini Wandfluh standard



DESCRIPTION


Direct operated 2/2-, 3/2 and 3/4-way solenoid poppet valve in flange construction. By means of the pressure tight switching solenoid, the poppet valve spool is opened or closed acting against the spring. Due to the poppet spool construction with pressure compensation on both sides, the flow through the valve is possible in both directions. The seat spool guide is sealed by means of an O-ring. The metallic sealing seat closes the valve virtually leak free.

APPLICATION


Poppet valves are used where tight closing functions of the valve are essential like leakage-free load holding, clamping or gripping. Miniature valves are used where both, reduced dimensions and weight are important.

SYMBOL


B.22030b




B.22031a




B.32030b



B.32031a



B.3403



TYPE CODE

2/2 or 3/2 way execution
 3/4 way execution

B S ☐ 2 03 ☐ - ☐ - ☐ # ☐
 B S 3 4 03 - ☐ - ☐ # ☐

Mounting interface acc. to Wandfluh standard

Solenoid, Super

2 way (connections)
 3 way (connections)

☐ 2
☐ 3

2 switching positions
 4 switching positions

Nominal size 3-Mini

Normally closed
 Normally open

Solenoid on A-side
 Solenoid on B-side

☐ 1a
☐ 0b

Nominal voltage U_N

12 VDC ☐ G12 115 VAC ☐ R115
 24 VDC ☐ G24 230 VAC ☐ R230

Sealing material

NBR ☐
 FKM (Viton) ☐ D1

Design index (subject to change)

1.11-2100

GENERAL SPECIFICATIONS

Designation	2/2-, 3/2- and 3/4-way poppet valve
Construction	Direct operated
Mounting	Flange construction
Nominal size	NG3-Mini according to Wandfluh standard
Actuation	Switching solenoid
Ambient temperature	-25...+70 °C
Weight	0,46 kg (2/2- and 3/2-way) 0,72 kg (3/4-way)
MTTFd	150 years

ELECTRICAL SPECIFICATIONS



Protection class	IP65
Relative duty factor	100 % DF
Switching frequency	15'000 / h
Service life time	10 ⁷ (number of switching cycles, theoretically)
Voltage tolerance	± 10 % with regard to nominal voltage
Standard nominal voltage	12 VDC, 24VDC, 115 VAC, 230 VAC AC = 50 to 60 Hz, rectifier integrated in the connector socket

Note! Other electrical specifications see data sheet 1.1-85



PERFORMANCE SPECIFICATIONS

Oil viscosity $\nu = 30 \text{ mm}^2/\text{s}$

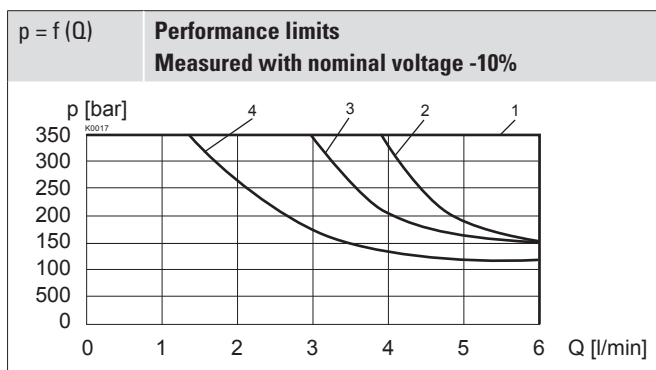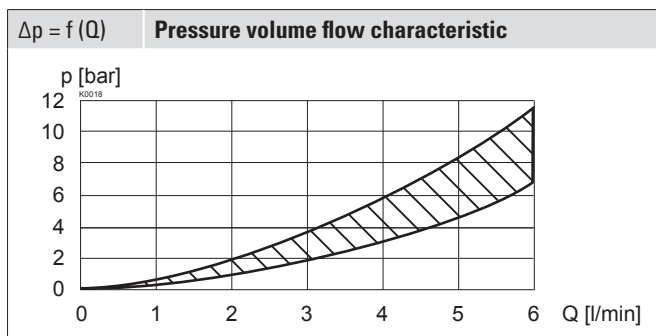

ACTUATION

Actuation	Switching solenoid, wet pin push type, pressure tight
Execution	SIS29V (Data sheet 1.1-85)
Connection	Connector socket DIN EN 175301 – 803

COMMISSIONING

Attention! When commissioning, the valve must be vented under pressure (max. two rotations of screw E).



HYDRAULIC SPECIFICATIONS

Working pressure	$p_{\max} = 350 \text{ bar}$
Maximum volume flow	$Q_{\max} = 6 \text{ l/min}$, see characteristic
Volume flow direction	Any (see characteristic)
Leakage oil	Poppet type, max. 0,05 ml / min (approx. 1 drop / min) at 30 cSt
Fluid	Mineral oil, other fluid on request
Viscosity range	12 mm ² /s...320 mm ² /s
Temperature range fluid	-25...+70 °C (NBR) -20...+70 °C (FKM)
Contamination efficiency	Class 20 / 18 / 14
Filtration	Required filtration grade $\beta_{10...16} \geq 75$, see data sheet 1.0-50

Type	Flow direction			
	P - A	A - T	A - P	T - A
BS22031a	1	-	2	-
BS22030b	1	-	3	-
BS32031a	1	2	4	1
BS32030b	1	2	4	1
BS3403	1	1	2	4

Attention! Long periods of non-actuation can reduce the switching performance



STANDARDS

Mounting interface	Wandfluh standard
Solenoids	DIN VDE 0580
Connection execution D	DIN EN 175301 – 803
Protection class	EN 60 529
Contamination efficiency	ISO 4406

INSTALLATION NOTES

Mounting type	Flange mounting 3 fixing holes for socket head screws M4 x 30
Mounting position	Any, preferably horizontal
Tightening torque	Fixing screws $M_0 = 2,6 \text{ Nm}$ (quality 8.8, zinc coated)

Note! The length of the fixing screw depends on the base material of the connection element.



ACCESSORIES

Fixing screws	Data sheet 1.0-60
Threaded subplates	Data sheet 2.9-05
Multi-station subplates	Data sheet 2.9-45
Horizontal mounting blocks	Data sheet 2.9-85
Technical explanations	Data sheet 1.0-100
Filtration	Data sheet 1.0-50
Relative duty factor	Data sheet 1.1-430

MANUAL OVERRIDE

Screw plug (HB0), no actuation possible
Optionally: See data sheet 1.1-300 and 1.1-311.

SEALING MATERIAL

NBR or FKM (Viton) as standard, choice in the type code


VALVES INSTALLED

The central functioning element is the poppet valve cartridge listed below

Article	Description	Data sheet no.
2203	Solenoid poppet valve cartridge normally closed NG3	1.11-2010


DIMENSIONS

3/2-; 2/2-way

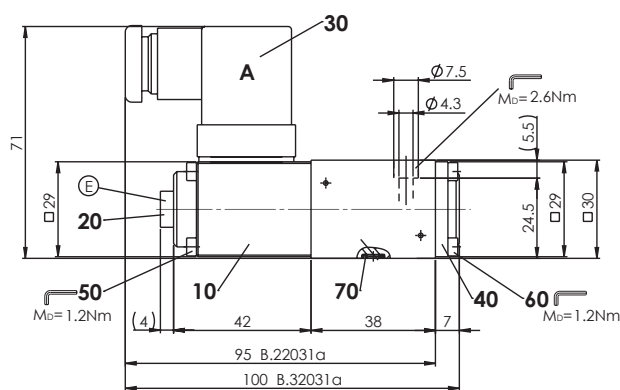


E = Air bleed screw


3/4-way

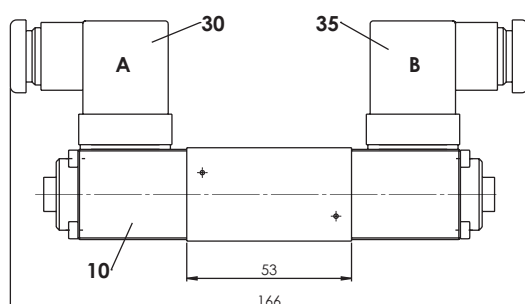

3/2-; 2/2-way



HYDRAULIC CONNECTION



SURFACE TREATMENT

- ◆ The valve body, the solenoid and the cover are zinc-nickel coated
- ◆ The socket head screws are zinc coated

PARTS LIST

Position	Article	Description
10	260.3...	Solenoid SIS29V
20	239.2033	Screw plug HB0 (incl. seal)
30	219.2001	Mating connector DIN EN 175301-803 grey
35	219.2002	Mating connector DIN EN 175301-803 black
40	056.4203	Cover
50	246.0141	Socket head screw M3 x 40 DIN 912
60	246.0109	Socket head screw M3 x 8 DIN 912
70	160.2045	O-ring ID 4,50 x 1,50 (NBR)
	160.6045	O-ring ID 4,50 x 1,50 (FKM)