

Solenoid operated poppet valve


Flange construction

- ◆ 4/3 way
- ◆ $Q_{max} = 40 \text{ l/min}$
- ◆ $p_{max} = 350 \text{ bar}$


DESCRIPTION

Direct operated 4/3-way solenoid poppet valve in flange construction. By means of the pressure tight switching solenoid, the poppet valve spool is opened or closed acting against the spring. Due to the poppet spool construction with pressure compensation on both sides, the flow through the valve is possible in both directions. The seat spool guide is sealed by means of an O-ring. The metallic sealing seat closes the valve virtually leak free.

SYMBOL



NG6
ISO 4401-03



APPLICATION

Poppet valves are used where tight closing functions of the valve are essential like leakage-free load holding, clamping or gripping.

COMMISSIONING

Attention! When commissioning, the valve must be vented under pressure (max. two rotations of screw E).



TYPE CODE

4/3 way execution

International standard interface ISO

Solenoid, Super

4-way (connections)

3 switching positions

Nominal size 6

Nominal voltage U_N	12 VDC	☐ G12	115 VAC	☐ R115
	24 VDC	☐ G24	230 VAC	☐ R230

Sealing material	NBR	☐
	FKM (Viton)	☐ D1

Design index (subject to change)

1.11-2150

A S 4 3 06 - ☐ - ☐ # ☐

GENERAL SPECIFICATIONS

Designation	4/3-way poppet valve
Construction	Direct operated
Mounting	Flange construction
Nominal size	NG6 according to ISO 4401-03
Actuation	Switching solenoid
Ambient temperature	-25...+70 °C (NBR) -20...+70 °C (FKM)
Weight	5,4 kg
MTTFd	150 years

ACTUATION

Actuation	Switching solenoid, wet pin push type, pressure tight
Execution	SIS45DV (Data sheet 1.1-127)
Connection	Connector socket DIN EN 175301 – 803

ELECTRICAL SPECIFICATIONS

Protection class	IP65
Relative duty factor	100 % DF
Switching frequency	15'000 / h
Service life time	10 ⁷ (number of switching cycles, theoretically)
Voltage tolerance	± 10 % with regard to nominal voltage
Standard nominal voltage	12 VDC, 24VDC, 115 VAC, 230 VAC AC = 50 to 60 Hz, rectifier integrated in the connector socket

Note! Other electrical specifications see data sheet 1.1-127





HYDRAULIC SPECIFICATIONS

Working pressure	$p_{\max} = 350 \text{ bar}$
Maximum volume flow	$Q_{\max} = 40 \text{ l/min}$, see characteristic
Volume flow direction	Any (see characteristic)
Leakage oil	Poppet type, max. 0,05 ml / min (approx. 1 drop / min) at 30 cSt
Fluid	Mineral oil, other fluid on request
Viscosity range	12 mm ² /s...320 mm ² /s
Temperature range fluid	-25...+70 °C (NBR) -20...+70 °C (FKM)
Contamination efficiency	Class 20 / 18 / 14
Filtration	Required filtration grade $\beta_{10...16} \geq 75$, see data sheet 1.0-50

PERFORMANCE SPECIFICATIONS

Oil viscosity $\nu = 30 \text{ mm}^2/\text{s}$

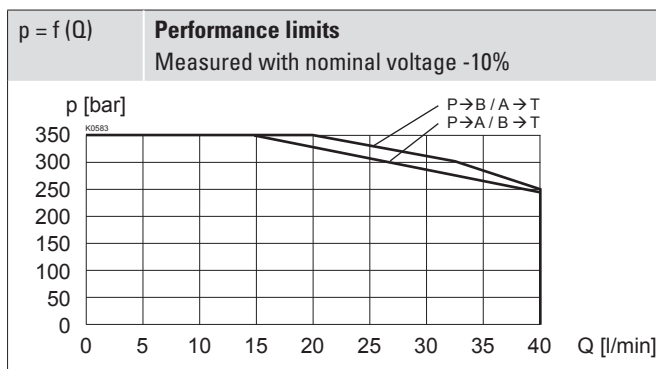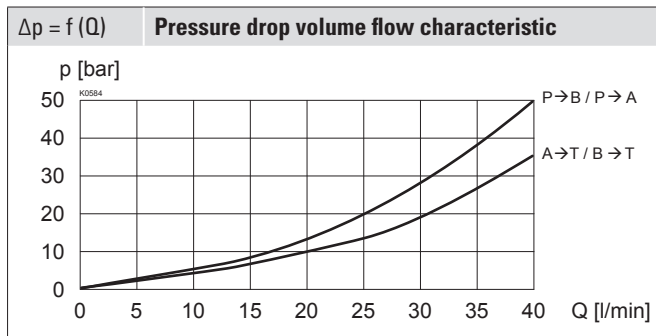

Attention! Long periods of non-actuation can reduce the switching performance



INSTALLATION NOTES

Mounting type	Flange mounting 4 fixing holes for socket head screws M5 x90
Mounting position	Any, preferably horizontal
Tightening torque	Fixing screws $M_0 = 9,7 \text{ Nm}$ (quality 12.9, zinc coated)

Note! The length of the fixing screw depends on the base material of the connection element.



STANDARDS

Mounting interface	ISO 4401-03
Solenoids	DIN VDE 0580
Connection execution D	DIN EN 175301 – 803
Protection class	EN 60 529
Contamination efficiency	ISO 4406

