
Proportional spool valve with additional hand lever actuation

Flange construction

- Q_{max} = 42 l/min
- 4 volume flow levels
- $Q_{N\,max}$ = 32 l/min
- p_{max} = 350 bar

NG6
ISO 4401-03




DESCRIPTION

Proportional spool valve according to data sheet 1.10-77 with additional hand lever actuation.

Note! The standard valve cannot be retrofitted.

SYMBOL

Overview spool types see data sheet 1.10-77

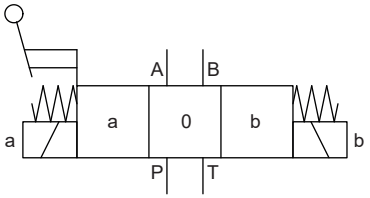


TYPE CODE

WD P F A06 - [ ] Z568 # 2

- Spool valve, direct operated
- Proportional
- Flange construction
- International standard interface ISO NG6
- Other type designation according to type code data sheet 1.10-77
- Hand lever
- Design index (subject to change)

1.10-78

DIMENSIONS

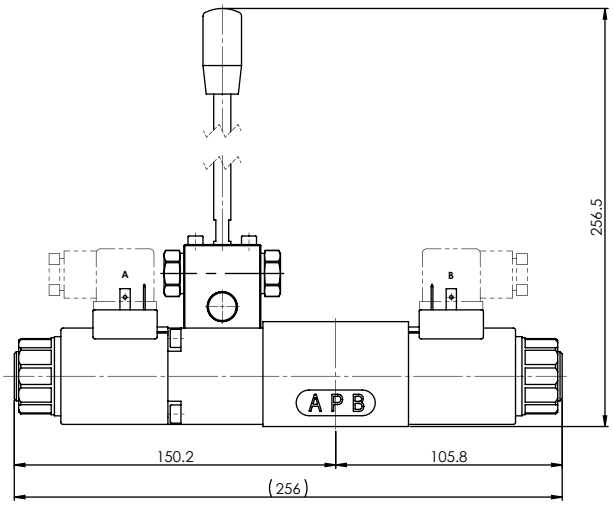

GENERAL SPECIFICATIONS

Weight	WDPFA06 +1,0 kg

Note! Further specifications, see data sheet 1.10-77

SURFACE TREATMENT

- The flange, the housing and the lever are zinc-nickel coated