Proportional throttle cartridge

- direct operated
- Q_{max} = 32 l/min
- $Q_{N\,max}$ = 25 l/min
- p_{max} = 350 bar

M22 x 1,5
ISO 7789



DESCRIPTION

Direct operated proportional throttle valve in screw-in cartridge construction for cavity according to ISO 7789. With the solenoid deenergised, the control spool is held in the closed position (DN) or open position (DO) by a spring. The change of the electric current is followed by a proportional volume flow change. Very sensitive opening and closing characteristics and low hysteresis are characteristics of these valves. For the control, Wandfluh proportional amplifiers are available (see register 1.13).

APPLICATION

Proportional throttle valves are suitable for smooth control of movements in stationary or mobile systems. The screw-in cartridge is perfectly suitable for installation in control blocks and is installed in sandwich- (vertical stacked systems) and in flange plates (corresponding data sheets in this register). For machining the cartridge cavity in steel and aluminum blocks, cavity tools are available for purchase. Please refer to the data sheets in register 2.13.

SYMBOL

„normally closed" DN



„normally open" DO



TYPE CODE

D ☐ P PM22 - ☐ - ☐ / ☐ ☐ - ☐ ☐ # ☐

Throttle valve		
Normally closed		N
Normally open		O
Proportional		
Screw-in cartridge M22 x 1,5		
Nominal volume flow rate Q_N	3,5 l/min	3,5
	6,3 l/min	6,3
	10 l/min	10
	25 l/min	25
Nominal voltage U_N	12 VDC	G12
	24 VDC	G24
	without coil	X5
Slip-on coil	Metal housing round	W
	Metal housing square	M
Connection execution	Connector socket EN 175301-803/ISO 4400	D
	Connector socket AMP Junior - Timer	J
	Connector Deutsch DT04-2P	G
Sealing material	NBR	
	FKM (Viton)	D1
Armature tube	with screw plug HB0	
	with manual override	HB4,5
Design index (subject to change)		

2.6-531

GENERAL SPECIFICATIONS

Designation	Proportional throttle valve
Construction	Direct operated
Mounting	Screw-in cartridge construction
Nominal size	M22 x 1,5 according to ISO 7789
Actuation	Proportional solenoid
Ambient temperature	-25…+70 °C
Weight	0,57 kg
MTTFd	150 years

ELECTRICAL SPECIFICATIONS

Protection class	Connection execution D: IP65 Connection execution G: IP67 and IP69K Connection execution I/ J: IP66
Relative duty factor	100 % DF
Standard nominal voltage	12 VDC, 24 VDC
Limiting current at 50 °C	I_G = 1320 mA (U_N = 12VDC) I_G = 660 mA (U_N = 24VDC)

Note! Other electrical specifications see data sheet 1.1-173 (slip-on coil W) and 1.1-174 (slip-on coil M)

ACTUATION

Actuation	Proportional solenoid, wet pin push type, pressure tight
Execution	W.S37 / 19 x 50 (data sheet 1.1-173) M.S35 / 19 x 50 (data sheet 1.1-174)
Connection	Connector socket DIN EN 175301 – 803 Connector Deutsch DT04 – 2P Connector socket AMP Junior-Timer axial Connector socket AMP Junior-Timer radial

HYDRAULIC SPECIFICATIONS

Working pressure	p_{max} = 350 bar
Maximum volume flow	Q_{max} = 32 l/min
Volume flow direction	1 → 2
Leakage oil	On request
Nominal volume flow range	Q_N = 3,5; 6,3; 10; 25 l/min at 10 bar valve pressure drop
Hysteresis	≤ 8 % (DN); 10-12 % (DO) at optimal dither signal
Fluid	Mineral oil, other fluid on request
Viscosity range	12 mm²/s…320 mm²/s
Temperature range fluid	-25…+70 °C (NBR) -20…+70 °C (FKM)
Contamination efficiency	Class 18 / 16 / 13
Filtration	Required filtration grade ß 6…10 ≥ 75, see data sheet 1.0-50

PERFORMANCE SPECIFICATIONS

Oil viscosity υ = 30 mm²/s

Q = f (I) **Volume flow adjustment characteristics DN**
Δp = 20 bar

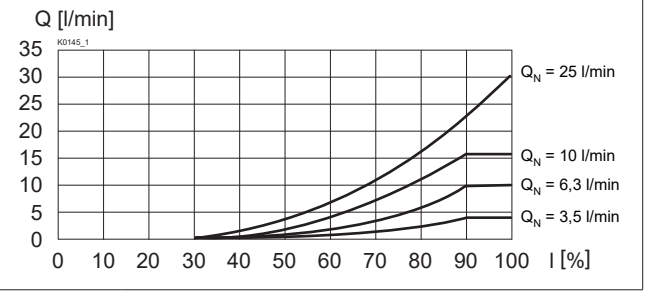

Q = f (I) **Volume flow adjustment characteristics DO**
Δp = 20 bar

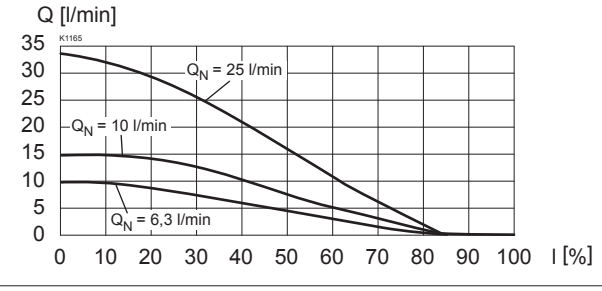

PERFORMANCE SPECIFICATIONS

Oil viscosity υ = 30 mm²/s

Q = f (p) **Volume flow pressure characteristics DN**
I = I_G

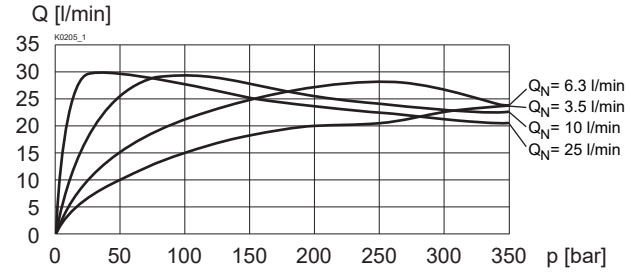

Q = f (p) **Volume flow pressure characteristics DO**
I = 0 mA

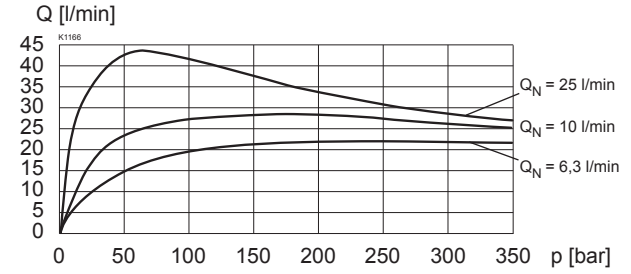

Δp = f (Q) **Pressure drop volume flow characteristic DN**
I = I_G

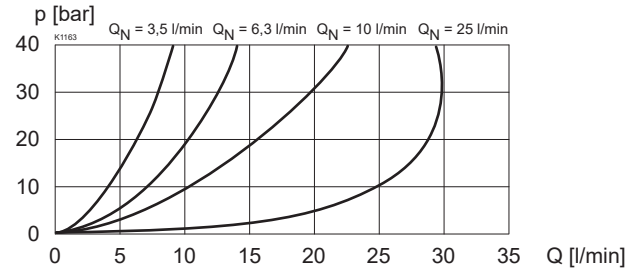

Δp = f (Q) **Pressure drop volume flow characteristic DO**
I = 0 mA

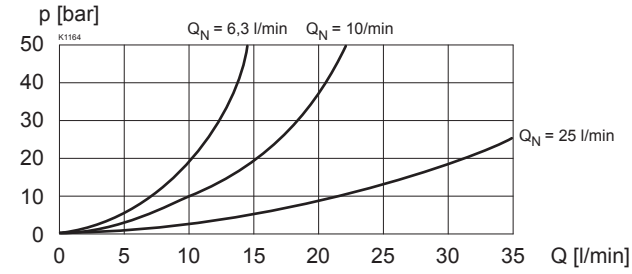

SURFACE TREATMENT

- The cartridge body is gas-nitro-carburised
- The armature tube and the slip-on coil are zinc- / nickel-coated

SEALING MATERIAL

NBR or FKM (Viton) as standard, choice in the type code

INSTALLATION NOTES

Mounting type	Screw-in cartridge M22 x 1,5
Mounting position	Any, preferably horizontal
Tightening torque	M_D = 60 Nm Screw-in cartridge M_D = 5 Nm knurled nut M_D = 9,5 Nm HB0 M_D = 5,5 Nm HB4,5

STANDARDS

Cartridge cavity	ISO 7789
Solenoids	DIN VDE 0580
Connection execution D	DIN EN 175301 – 803
Protection class	EN 60 529
Contamination efficiency	ISO 4406

ACCESSORIES

Proportional amplifier	Register 1.13
Mating connector black (B)	Article no. 219.2002
Flange body / sandwich plate NG4-Mini	Data sheet 2.6-720
Flange body / sandwich plate NG6	Data sheet 2.6-740
Threaded body	Data sheet 2.9-205
Technical explanations	Data sheet 1.0-100
Filtration	Data sheet 1.0-50
Relative duty factor	Data sheet 1.1-430

MANUAL OVERRIDE

HB4,5
Optionally: Screw plug (HB0), no actuation possible

DIMENSIONS

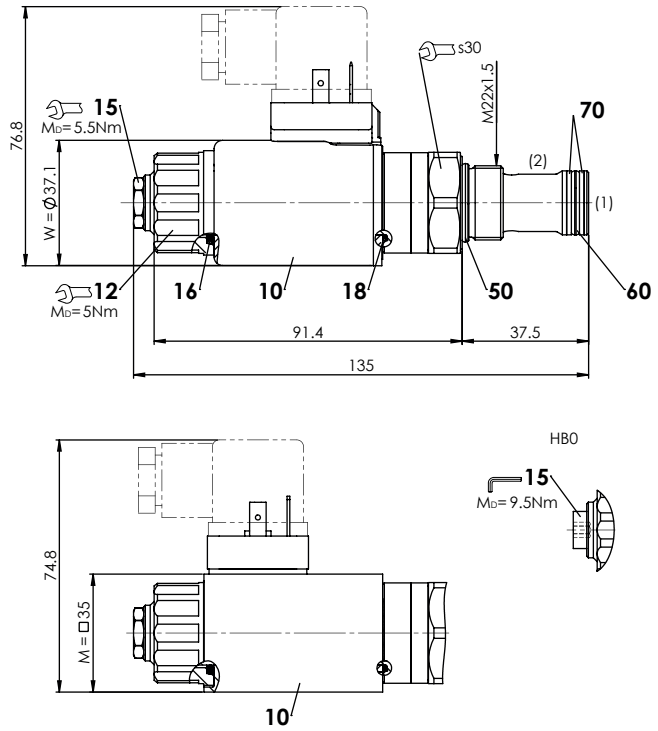

HYDRAULIC CONNECTION

Cavity drawing according to ISO 7789–22–01–0–98



Note! For detailed cavity drawing and cavity tools see data sheet 2.13-1008

PARTS LIST

Position	Article	Description
10	206.2… 260.5…	W.S37 / 19 x 50 M.S35 / 19 x 50
12	154.2700	Knurled nut
15	253.8000 239.2033	HB4,5 manual override HB0 Screw plug
	251.3209	Seal kitD.PPM22/D.BPM22
	-	Seal kit consisting of:
16		O-ring ID 18,72 x 2,62
18		O-ring ID 17,17 x 1,78
50		O-ring ID 18,77 x 1,78
60		O-ring ID 15,60 x 1,78
70		Backup ring rd 16,1 x 19 x 1,4