

Solenoid operated poppet valve stainless

Flange construction

- ◆ 2/2- or 3/2-way
- ◆ normally open and normally closed
- ◆ $Q_{max} = 40 \text{ l/min}$
- ◆ $p_{max} = 350 \text{ bar}$

DESCRIPTION

Direct operated 2/2- and 3/2-way poppet valve in flange construction. By means of the pressure tight switching solenoid, the poppet valve spool is opened or closed acting against the spring. Due to the poppet spool construction with pressure compensation on both sides, the flow through the valve is possible in both directions. The metallic sealing seat closes the valve virtually leak free. The pressure tight encapsulated Ex-protection solenoid coil prevents an explosion on the inside penetrating to the outside as well as an ignitable surface temperature.

CERTIFICATES

| | Surface | Mining | Standard -25 °C to... | Z604 -40 °C to... |
|--------------|---------|--------|--------------------------|----------------------|
| ATEX / UKEX | x | x | x | x |
| IECEX | x | x | x | x |
| CCC | x | x | x | x |
| EAC | x | x | x | x |
| Australia | x | x | x | x |
| MA | | x | x | |
| USA / Canada | x | | x | x |
| PESO | x | | x | x |

The certificates can be found on www.wandfluh.com

NG6

ISO 4401-03

Ex db IIC T6, T4 Gb (Zone 1)

Ex tb III C T80 °C, T130 °C Db (Zone 21)

Ex db I Mb


⊕ II 2 G Ex db IIC T6, T4

⊕ II 2 D Ex tb III C T80 °C, T130 °C

⊕ I M2 Ex db I Mb

Class I, Division 1, Group A, B, C, D T4

Class II & III, Division I, Group E, F, G T4

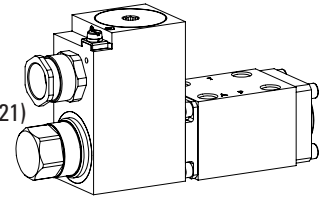

APPLICATION

These valves are suitable for applications in explosion-hazard areas, open cast and also in mines. The stainless execution is especially suitable for the use in wet and salty environment. Poppet valves are used where tight closing functions of the valve are essential like leakage-free load holding, clamping or gripping.

ACTUATION

| | |
|------------|---|
| Actuation | Switching solenoid, wet pin push type, pressure tight |
| Execution | MKY45 / 18x60 (data sheet 1.1-183) |
| Connection | Cable gland for cable Ø 6,5...14 mm |

Attention! The UC execution is always supplied without cable gland




STANDARDS


| | |
|--------------------------|---------------------------------|
| Explosion protection | Directive 2014 / 34 / EU (ATEX) |
| Flameproof enclosure | EN / IEC / UL 60079-1, 31 |
| Cable entry | EN 60079-0, 1, 7, 15, 31 |
| Mounting interface | ISO 4401-03 |
| Protection class | EN 60 529 |
| Contamination efficiency | ISO 4406 |

SYMBOL


A.22060b




A.22061a



A.32060b



A.32061a



TYPE CODE

| | | | |
|---|-----------------------------|---|--|
| International standard interface ISO | | A Exd <input type="checkbox"/> 2 06 <input type="checkbox"/> - <input type="checkbox"/> / <input type="checkbox"/> / <input type="checkbox"/> - <input type="checkbox"/> # <input type="checkbox"/> | |
| Explosion-proof execution, Ex d | | | |
| 2 way (connections) | <input type="checkbox"/> | | |
| 3 way (connections) | <input type="checkbox"/> | | |
| 2 switching positions | | | |
| Nominal size 6 | | | |
| Normally closed | Solenoid on A-side | <input type="checkbox"/> | |
| Normally open | Solenoid on B-side | <input type="checkbox"/> | |
| Nominal voltage U_N | 12 VDC | <input type="checkbox"/> | 115 VAC |
| | 24 VDC | <input type="checkbox"/> | 230 VAC |
| Nominal power P_N | 9 W | <input type="checkbox"/> | Ambient temperature up to: 40 °C or 90 °C |
| | 15 W | <input type="checkbox"/> | 70 °C |
| Certification | ATEX, UKEX, IECEX, EAC, CCC | <input type="checkbox"/> | USA / Canada |
| | Australia | <input type="checkbox"/> | India |
| | MA | <input type="checkbox"/> | |
| Sealing material / Temperature range | NBR | <input type="checkbox"/> | |
| | FKM (Viton) | <input type="checkbox"/> | |
| | NBR -40 °C | <input type="checkbox"/> | (only with 15 W) |
| Stainless | with K8 coil | <input type="checkbox"/> | |
| | with K9 coil | <input type="checkbox"/> | |

Design index (subject to change)

1.11-3143S



GENERAL SPECIFICATIONS

| | |
|---------------------|--|
| Designation | 2/2-, 3/2-way poppet valve |
| Construction | Direct operated |
| Mounting | Flange construction |
| Nominal size | NG6 according to ISO 4401-03 |
| Actuation | Ex-protection switching solenoid |
| Ambient temperature | Operation as T6 -25...+40 °C (L9) Operation as T4 -25...+90 °C (L9) -25...+70 °C (L15) -40...+70 °C (L15) |
| Weight | 3,3 kg |
| MTTFd | 150 years |

HYDRAULIC SPECIFICATIONS


| | |
|-----------------------------|--|
| Working pressure | $p_{max} = 350$ bar |
| Maximum volume flow | $Q_{max} = 40$ l/min, see characteristic |
| Volume flow direction | Any (see characteristic) |
| Leakage oil | Poppet type, max. 0,05 ml / min (approx. 1 drop / min) at 30 cSt |
| Fluid | Mineral oil, other fluid on request |
| Viscosity range | 12 mm ² /s...320 mm ² /s |
| Temperature range fluid | Operation as T6 NBR -25...+40 °C (L9) FKM -20...+40 °C (L9) Operation as T4 NBR -25...+70 °C (L9 or L15) FKM -20...+70 °C (L9 or L15) NBR 872 -40...+70 °C (L15) |
| Contamination efficiency | Class 20 / 18 / 14 |
| Filtration | Required filtration grade $\beta_{10...16} \geq 75$, see data sheet 1.0-50 |

PERFORMANCE SPECIFICATIONS

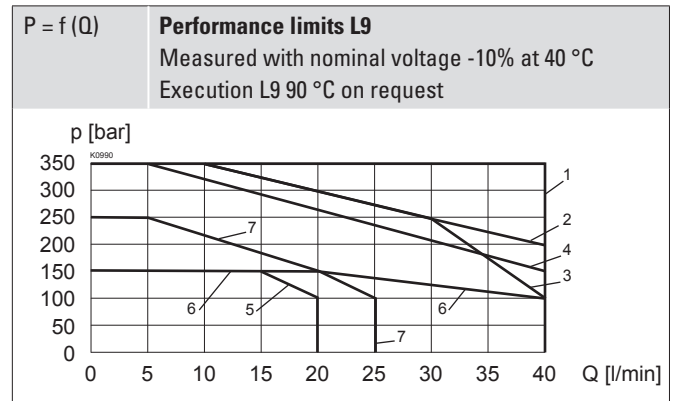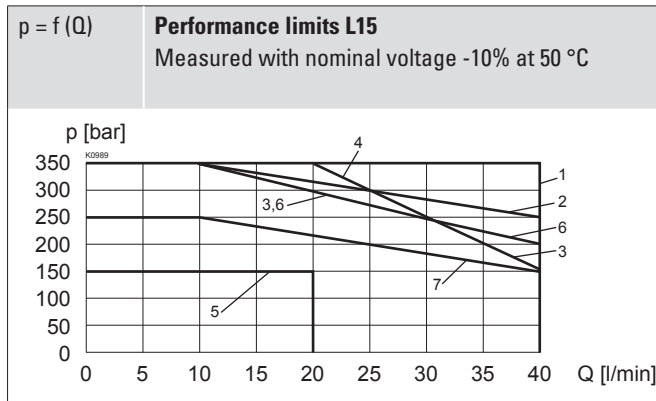
 Oil viscosity $\nu = 30 \text{ mm}^2/\text{s}$


| Type | Flow direction | | | |
|------------|----------------|-------|-------|-------|
| | P - A | A - T | A - P | T - A |
| AEXd22061a | 1 | - | 6 | - |
| AEXd22060b | 1 | - | 3 | - |
| AEXd32061a | 1 | 2 | 5 | 1 |
| AEXd32060b | 1 | 4 | 7 | 1 |


| Type | Flow direction | | | |
|------------|----------------|-------|-------|-------|
| | P - A | A - T | A - P | T - A |
| AEXd22061a | 1 | - | 6 | - |
| AEXd22060b | 1 | - | 3 | - |
| AEXd32061a | 1 | 2 | 5 | 1 |
| AEXd32060b | 1 | 4 | 7 | 1 |

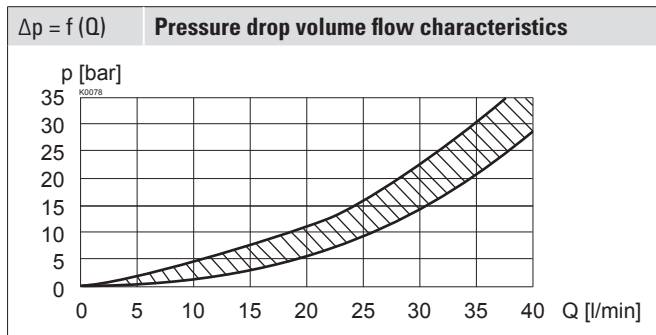
ELECTRICAL SPECIFICATIONS

| | |
|--------------------------|--|
| Protection class | IP65 / 66 / 67 |
| Relative duty factor | 100 % DF |
| Switching frequency | 12'000 / h |
| Voltage tolerance | $\pm 10 \%$ with regard to nominal voltage |
| Standard nominal voltage | 12 VDC, 24VDC, 115 VAC, 230 VAC AC = 50 to 60 Hz $\pm 2 \%$, with built-in two-way rectifier |
| Standard nominal power | 9 W, 15 W |
| Temperature class | Nominal power 9 W: T1...T6 Nominal power 15 W: T1...T4 |

Note!  With the L15 execution for ambient temperatures up to 70 °C, the performance specifications have been evaluated with an ambient temperature of 50 °C

Attention!  Long periods of non-actuation can reduce the switching performance

Note!  Other electrical specifications see data sheet 1.1-183

SURFACE TREATMENT

-The valve body, the cover and the socket head screws are made of stainless steel

-The slip-on coil and the armature tube are zinc nickel coated

Optionally K10:

-The coil is made of stainless steel

SEALING MATERIAL

NBR or FKM (Viton) as standard, choice in the type code

MANUAL OVERRIDE

Screw plug (HB0), no actuation possible



Optionally: HB6, HN(K) or HG(K)

→ See data sheet 1.1-311

VALVES INSTALLED

The central functioning element is the poppet valve cartridge NG6, data sheet 1.11-2030.


DIMENSIONS

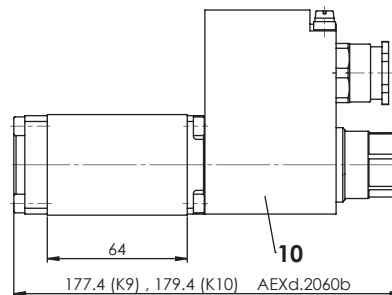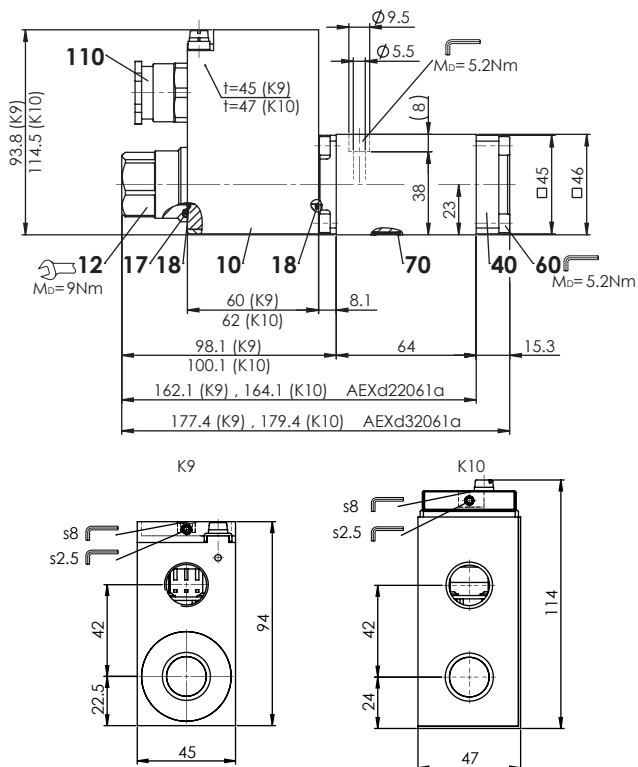

Note! The K9 coil (K10 valve) is 1 mm larger than the valve body. Usually, a distance plate is necessary.



HYDRAULIC CONNECTION

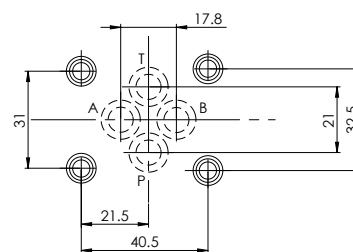

Dimensions of the solenoid coil see data sheet 1.1-183 and 1.1-183S

PARTS LIST

| Position | Article | Description |
|----------|----------|--|
| 10 | 263.6... | Solenoid coil MK.45 / 18 x 60 |
| 12 | 154.2201 | Knurled nut Ex M18 x 1,5 x 30 |
| 17 | 160.2251 | O-ring ID 25,07 x 2,62 (NBR) |
| 18 | 160.2170 | O-ring ID 17,17 x 1,78 (NBR) |
| 40 | 058.4221 | Cover 45 /45 x 17,5 K9 |
| 60 | 246.2516 | Socket head screw M5 x 16 A4 DIN 912 |
| 70 | 160.2093 | O-ring ID 9,25 x 1,78 (NBR) „-25 °C to...” |
| | 160.7092 | O-ring ID 9,25 x 1,78 (NBR) „-40 °C to...” |
| | 160.6092 | O-ring ID 9,25 x 1,78 (FKM) |
| 110 | 111.1080 | Cable gland M20 x 1,5 |

INSTALLATION NOTES

| | |
|-------------------|--|
| Mounting type | Flange mounting 4 fixing holes for socket head screws M5 x 45 |
| Mounting position | Any, preferably horizontal |
| Tightening torque | Fixing screws $M_D = 5,1$ Nm (screw quality A4) $M_D = 9$ Nm knurled nut |

Note! The length of the fixing screw depends on the base material of the connection element.



Attention! For stack assembly please observe the remarks in the operating instructions



COMMISSIONING

Attention! The solenoid coil must only be put into operation, if the requirements of the operating instructions supplied are observed to their full extent. In case of non-observance, no liability can be assumed.



ACCESSORIES

| | |
|------------------------|--------------------|
| Technical explanations | Data sheet 1.0-100 |
| Filtration | Data sheet 1.0-50 |
| Relative duty factor | Data sheet 1.1-430 |